

# Beltone Envision™



Model (MM Receiver)	ENV1762S-DRWC* ENV1763-DRW* ENV1764-DRW*	ENV962S-DRWC ENV963-DRW ENV964-DRW	ENV662S-DRWC ENV663-DRW ENV664-DRW	ENV462S-DRWC ENV463-DRW ENV464-DRW
<b>Device Configurations</b>				
Battery size 62S-DRWC	Rechargeable Lithium-Ion			
Battery size 63-DRW	312 Zinc-Air			
Battery size 64-DRW	13 Zinc-Air			
Receiver Options	MM			
Control Options	TapControl (62S-DRWC), Push button (63-DRW and 62S-DRWC), Multi-Function button (64), Telecoil (64)			
IP Classification	IP68			
<b>Audiological Features</b>				
Channels	17	14	12	12
CrossLink Directionality 4	●	-	-	-
CrossLink Directionality 3	-	●	-	-
CrossLink Directionality 2	-	-	-	●
True Focus**	●	-	-	-
Clear Focus***	●	-	-	-
Ultra Focus 2	-	●	-	-
Ultra Focus	-	-	●	-
M&RIE	●	●	●	●
Smart Beam Steering (w/Adjustable Mixing Point Frequency)	●	●	●	●
Speech Spotter Pro	●	●	●	●
Streaming Bass Boost	3 Settings	3 Settings	2 Settings	2 Settings
Smart Gain Pro	●	-	-	-
Smart Gain	-	●	●	●
True Noise Reduction****	3 Settings	-	-	-
Sound Cleaner	5 Settings	4 Settings	3 Settings	2 Settings
Wind Noise Reduction	3 Settings	3 Settings	2 Settings	2 Settings
Impulse Noise Reduction	3 Settings	3 Settings	2 Settings	2 Settings
Silencer	3 Settings	3 Settings	2 Settings	2 Settings
Sound Shifter	●	●	●	●
Feedback Eraser 2	●	●	●	●
Synchronised SATISFY	●	●	●	●
Tinnitus Breaker Pro	●	●	●	●
<b>Functional Features</b>				
Ear-to-Ear Communication	●	●	●	●
Bluetooth® Auracast™	●	●	●	●
Direct audio streaming (compatible iOS**** and Android™ devices)	●	●	●	●
TV-Streamer+, Multi-Mic+ and Remote Control	●	●	●	●
Beltone HearMax™ app	●	●	●	●
Sound Enhancer (Beltone HearMax™ app)	●	-	-	-
<b>Remote Fine Tuning and Updates</b>				
Remote Fine Tuning	●	●	●	●
Beltone Remote Care Live	●	●	●	●
Remote Firmware Updates	●	●	●	●
<b>Fitting Features</b>				
Beltone Solux Max™ 2.1 or higher	●	●	●	●
Fully Flexible Programs	4	4	4	4
Datalogging	●	●	●	●
Wireless fitting with Noahlink Wireless	●	●	●	●
Automatic Receiver Detection	●	●	●	●

\* ENVx62S-DRWC, ENVx63-DRW, and ENVx64-DRW models have the capability to change the feature set from the highest level to the other price points for demo purposes.  
 \*\* True Focus only available for the 62S model.  
 \*\*\* Clear Focus only available for the 63 and 64 models.  
 \*\*\*\* True Noise Reduction only available in the Hear in Noise program of 62S models.  
 \*\*\*\*\* MFi supports hands-free calls for iPhone 11 or later, iPad Pro 12.9-inch (5th generation), iPad Pro 11-inch (3rd generation), iPad Air (4th generation), iPad mini (6th generation) or later, with software updates iOS 15.3 and iPadOS 15.3 or later.



**Desktop charger**  
Charging form factor (CFF) 8



**Standard charger**  
Charging form factor (CFF) 8



**Premium charger**  
Charging form factor (CFF) 8



© 2024 GN Hearing A/S. All rights reserved. Beltone is a trademark of GN Hearing A/S. Apple, the Apple logo, iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google LLC. The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.

402947000GB-25.01-Rev.D



**Worldwide Headquarters**  
GN Hearing A/S  
Lautrupbjerg 7  
DK-2750 Ballerup,  
Denmark  
Tel.: +45 45 75 11 11  
beltone.com

CVR no. 55082715

**Australia**  
GN Hearing Australia Pty Ltd  
Suite 1001, Level 1  
1 Julius Avenue  
North Ryde, NSW 2113  
Australia  
Tel.: (free) 1800 658 955  
beltone.com

**New Zealand**  
GN Hearing New Zealand Limited  
Ground Floor, North Entrance  
4 Fred Thomas Drive  
Takapuna, Auckland, 0622  
Tel.: (free) 0800 900 126  
beltone.com





# Technical Specifications

MM			
ANSI S3.22-2014 IEC 60118-0:2015 JIS C 5512: 2015 2cc coupler			
Reference test gain (60 dB SPL input)	HFA	37	dB
Full-on gain (50 dB SPL input)	Max. HFA	61 50	dB
Maximum output (90 dB SPL input)	Max. HFA	115 113	dB SPL
Total harmonic distortion	500 Hz	0.4	%
	800 Hz	0.6	
	1600 Hz	0.4	
Telecoil sensitivity (1 mA/m input)*	Max.	90	dB SPL
HFA - SPLIV @ 31.6 mA/m (ANSI)	HFA	97	
Full-on telecoil sensitivity @ 1mA/m	HFA	80	
Equivalent input noise, w/o Noise reduction		22	dB SPL
1/3 Octave Equivalent input noise, w/o Noise reduction	1600 Hz	9	dB SPL
Frequency range		<200 - >8000	Hz
Battery Lifetime (Battery type Rechargeable)**		30 (max) 24 (typ)	Hours
Current Drain (Quiescent / Operating) (Model 63-DRW, 64-DRW)		0.81 / 0.83	mA

\* Telecoil is only for the ENVx64-DRW models.

\*\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.  
Maximum number includes no streaming; typical number includes several hours of streaming.

Patents pending.

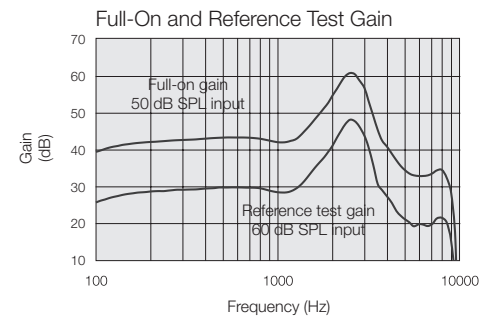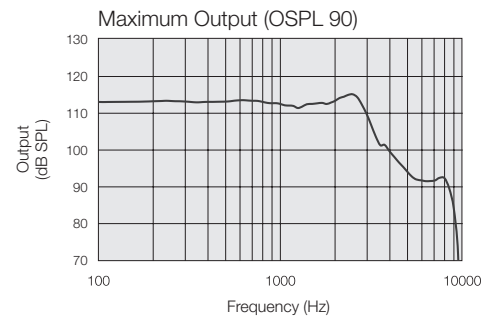

All specifications are subject to change without notice.

